


## Submersible Composite Hose Type 914/924

### Applications

This type is designed for use with submersible pumps and for all other applications where the hose is exposed to the product like heavy chemicals, both on the inside and outside. It is recommended for applications as heavy duty marine operations and ship and barge loading and unloading.

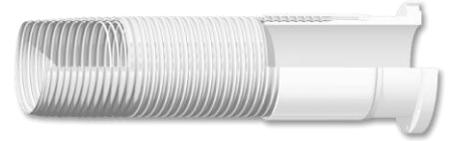

### Technical description

|                       |  |
|-----------------------|--|
| Lining                | : SSP914, Polypropylene (80°C)<br>: SSF924, PTFE (100°C) |
| Inner Wire            | : Stainless Steel 316                                    |
| Outer Wire            | : Stainless Steel 316                                    |
| Cover                 | : Polypropylene, No marking, White                       |
| Temperature range     | : -30°C to + 80°C / 100°C (-22°F to + 176°F / + 212°F)   |
| Electrical properties | : Electrically conductive                                |
| Standard              | : EN13765:2018, Type 3                                   |
| Complies with         | : IMO IBC code   |
| Approval              | : ClassNK Certificate N0. TA21511E(AL)                   |

### Physical properties

|                    |                        |
|--------------------|------------------------|
| Maximum elongation | : 10% on test pressure |
| Vacuum range       | : 0,9 bar              |

### End Fittings

Specially designed end fittings have been developed for use with Amniflex Composite hoses, including threaded ends, flanged ends and other connections. By means of a hydraulic operated press, a ferrule is externally swaged onto the hose to secure the hose shank and guarantee a leak proof connection between hose and fitting. All ferrules are welded to the end fitting before swaging for even safer operating conditions.

### Technical data: Type SSP914/SSF924

| Inside Diameter |     | Working Pressure |     | Min. Bend Radius |     | Approx. Weight |       | Max. length |    |
|-----------------|-----|------------------|-----|------------------|-----|----------------|-------|-------------|----|
| inches          | mm  | psi              | bar | inches           | mm  | lbs/ft         | kg/m  | ft.         | m  |
| 1 ½             | 40  | 200              | 14  | 4½               | 112 | 0,85           | 1,25  | 65          | 20 |
| 2               | 50  | 200              | 14  | 5½               | 140 | 1,35           | 2,00  | 65          | 20 |
| 2 ½             | 65  | 200              | 14  | 6½               | 165 | 1,75           | 2,60  | 65          | 20 |
| 3               | 80  | 200              | 14  | 9                | 230 | 2,50           | 3,70  | 65          | 20 |
| 4               | 100 | 200              | 14  | 15               | 380 | 4,40           | 6,50  | 65          | 20 |
| 5               | 125 | 200              | 14  | 17               | 435 | 5,80           | 8,60  | 65          | 20 |
| 6               | 150 | 200              | 14  | 18               | 460 | 7,00           | 10,50 | 79          | 24 |
| 8               | 200 | 200              | 14  | 27               | 690 | 12,00          | 18,00 | 50          | 15 |

Safety factor acc. to EN 13765:2018

All information in this document is without any obligation, specifications subject to change without any notice.

#### Amniflex B.V.

Abraham van Stolkweg 118  
3041 JA, Rotterdam  
T: +31(0)10 2982121  
E: amniflex@plastiflex.com  
www.amniflex.com

BTW nr. NL862140729B01  
Bank: KBC Bank NV  
KREDNL2XXXX  
IBAN NL23 KRED0633024376

K.v.K. Rotterdam nr. 81568053

Al onze aanbiedingen en leveranties geschieden volgens onze algemene leveringsvoorwaarden.

