


Vapor Recovery Composite Hose 466

Applications

This type is recommended for use with vapor recovery systems in tank-truck, bottom loading and ship to shore applications. For chemicals as well for hydrocarbon vapor. A stainless steel outer wire is available for applications which include a corrosive environment.

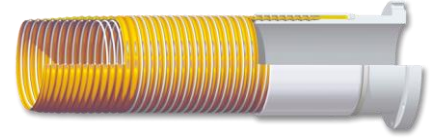

Technical description

Lining	: Polypropylene
Inner Wire	: Polypropylene coated Steel
Outer Wire	: PGP466 Galvanized Steel PSP466 Stainless Steel 304 or 316
Cover	: PVC coated Nylon, Yellow
Temperature range	: -30°C to + 80°C (-22°F to + 176°F)
Electrical properties	: Electrically conductive
Standard	: EN13765:2018, Type 1
Complies with	: IMO IBC code

Physical properties

Maximum elongation	: 10% on test pressure
Vacuum range	: 0,5 bar

End Fittings

Specially designed end fittings have been developed for use with Amniflex composite hoses, including threaded ends, flanged ends and other connections. By means of a hydraulic operated press, a ferrule is externally swaged onto the hose to secure the hose shank and guarantee a leak proof connection between hose and fitting. All ferrules are welded to the end fitting before swaging for even safer operating conditions.

Technical data: Type PGP466/PSP466

Inside Diameter		Working Pressure		Min. Bend Radius		Approx. Weight		Max. length	
inches	mm	psi	bar	inches	mm	lbs/ft	kg/m	ft.	m
1	25	58	4	3.75	94	0,75	1,13	65	20
2	50	58	4	5	125	1,00	1,50	65	20
3	75	58	4	7	175	1,75	2,60	65	20
4	102	58	4	11	275	2,55	3,80	65	20
5	125	58	4	14	360	3,05	4,50	65	20
6	150	58	4	16	410	3,60	5,30	79	24
8	200	58	4	22	560	8,05	11,90	65	20
10	250	58	4	30	760	10,35	15,30	50	15

Safety factor: according to EN 13765

All information in this document is without any obligation, specifications subject to change without any notice.

Amniflex B.V.

Abraham van Stolkweg 118
3041 JA, Rotterdam
T: +31(0)10 2982121
E: amniflex@plastiflex.com
www.amniflex.com

BTW nr. NL862140729B01
Bank: KBC Bank NV
KREDNL2XXXX
IBAN NL23 KRED0633024376

K.v.K. Rotterdam nr. 81568053

Al onze aanbiedingen en leveranties geschieden volgens onze algemene leveringsvoorwaarden.

